


trail jet 15



... ➔ www.falch.com



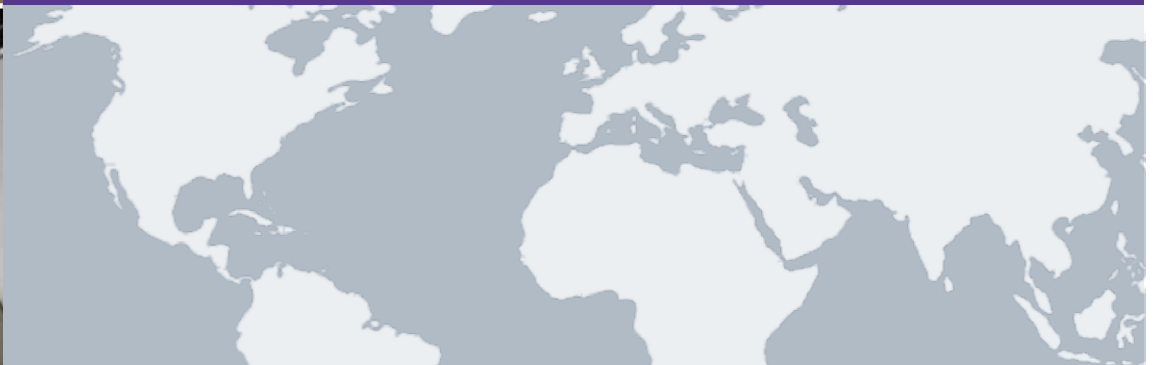












30 m



trail jet 15

trail jet 15 300-24-70-d

trail jet 15 500-15-100-d

	100 - 300 bar	100 - 500 bar
	13 - 24 l/min	8 - 15 l/min
	30 - 70° C (100° C)	30 - 100° C
	99 kW 12 v dc	99 kW 12 v dc
	4,5 l/h	4,5 l/h
	23 kW / 15 kW 1900 rpm, 1000 rpm, 2 cyl., 1370 ccm, oil	23 kW / 15 kW 1900 rpm, 1000 rpm, 2 cyl., 1370 ccm, oil
	2,4 l/h	2,4 l/h
	15 kW 1450 rpm, 1,0 - 8,0 bar, 40 °C	15 kW 1450 rpm, 1,0 - 8,0 bar, 40 °C
	060 USgal/min / 1,75 mm	030 USgal/min / 1,25 mm
	■	■
	■	■
	■	■
	24 h	24 h
	24 month	24 month
	200 l	200 l
	90 l	90 l
	900 kg, 1300 kg, 100 kg	900 kg, 1300 kg, 100 kg
	3200 x 1600 x 1830 mm	3200 x 1600 x 1830 mm
	LpA = 76 dB LwA = 99 dB	LpA = 76 dB LwA = 99 dB
	g577	g576

accessories



competence for water jetters:



Falch gmbh

siemensstrasse 1 - 7

89188 merklingen (germany)

+49 (0)7337/81-0

+49 (0)7337/81-181

info@falch.com / www.falch.com

